


**Filter: P5M03**

**Color:** Grey  
**Material:** Polycarbonate  
**VLT:** 25%



**Optical Density (OD):**

- OD 8+ @ 180 - 375 nm
- OD 6+ @ 1020 - <1030 nm
- OD 7+ @ 1030 - <1040 nm
- OD 8+ @ 1040 - 1064 nm
- OD 7+ @ >1064 - 1073 nm
- OD 6+ @ >1073 - 1083 nm
- OD 5+ @ >1083 - 1090 nm
- OD 2+ @ 1400 - <1600 nm
- OD 3+ @ 1600 - <1750 nm
- OD 4+ @ 1750 - 3000 nm
- OD 5+ @ 1980 - 2550 nm
- OD 6+ @ 5400 - 11500 nm

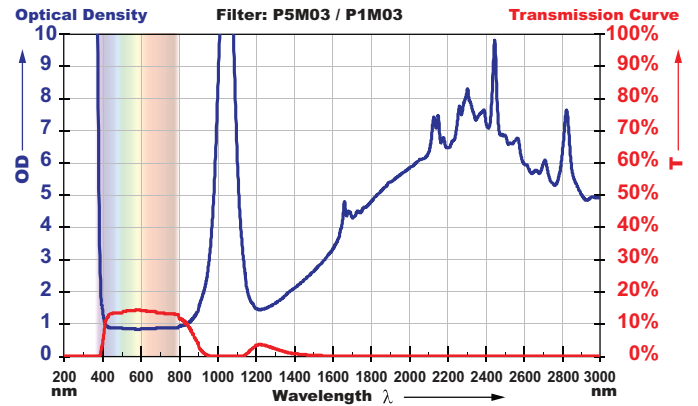

Visual interpretation of data. Please refer to the OD specifications for the actual protection level.

**Available Frames**

**F18.P5M03.5000**



**F22.P5M03.5000**



**F42.P5M03.5000**



Authorized Laservision Signature

Date